
LDA-802-64 Lab Brick® High Resolution Digital Attenuator

200 - 8000 MHz Frequency | 120 dB Attenuation Range | 0.1 Step Size

Features/Benefits

- Reliable and Repeatable solid state digital attenuation
- Includes Windows GUI and SDK, macOS GUI and SDK, Linux SDK, LabVIEW driver, Python examples and more
- Single shot or repeating programmable attenuation ramps
- Fading profiles programmable from GUI or SDK
- USB and Ethernet Control
- Configurable Static IP or DHCP
- Password protected Ethernet Interface
- Sized to fit into four rack units for ATE applications



Applications

- WiFi, WiFi6E, 3G, 4G, 5G, LTE, DVB, Microwave Radio Fading Simulators
- Engineering/Production Test Labs
- Automated Test Equipment (ATE)

The Lab Brick LDA series of Digital Attenuators bring affordability, functionality, reliability and simplicity to the microwave test bench. The LDA products range from 6 MHz to 40 GHz with input level tolerance to 2 Watts and step size as small as 0.1 dB.

The LDA-802-64 offers both USB and Ethernet interfaces. The USB port uses a native HID interface to avoid the difficulties inherent in using older serial or IEEE-648 interfaces implemented over USB. As a result, Lab Brick users can get to work faster without having to install kernel level drivers, and Lab Brick devices can be easily used on any system that supports USB HID devices, including low cost embedded computers using Linux or similar operating systems. The Ethernet interface is configurable for Static IP or DHCP with the ability to assign the HTTP port for extra security.

The LDA-802-64 Digital Attenuator is a rack mounted 64-channel high dynamic range, bidirectional, 50 Ohm step attenuator. The LDA-802-64 provides 120 dB of attenuation control range from 200 to 8000 MHz with a step size of 0.1 dB. The attenuators are easily programmable for fixed attenuation, swept attenuation ramps and user defined fading profiles directly from the included Graphical User Interface (GUI). Alternatively, Vaunix supplies LabVIEW drivers, Windows API DLL files, macOS DYLIB files, Linux drivers, Python examples, and more for users wishing to develop their own interface.



LDA-802-64 Specifications

Parameter	Test Conditions	Min	Тур	Max
Frequency Range (MHz)		200		8000
Impedance (Ω)			50	
Channels			64	
Attenuation Range (dB)		110	120	
Step Size (dB)		0.1		
Insertion Loss (dB)	< 2 GHz		5.5	7
	< 4 GHz		7	9
	< 8 GHz		9	11
Attenuation Accuracy (dB)	<30 dB		0.2	1
	<60 dB		0.4	1.5
	<90 dB		0.6	2.5
	<110 dB		1	3
	<120 dB		2	7
Switching Speed (μs)			2	
Maximum Input Level (dBm)	Average/Peak		25/30	
Input IP3 (dBm)		38	45	
VSWR			1.5:1	


Parameter	Test Conditions/Notes		
Power Requirements	From the USB connection	+5 VDC 800 mA	
Environmental	Operating Temperature	-30 °C to +70 °C	
	Relative Humidity (non-condensing)	<95%	
Physical Connections	Power and Control	USB Type C – female	
	Control	USB Type C or Ethernet	
	RF Connectors ¹	SMA – female	
Operating Modes	Manual Attenuation Control Swept Attenuation – uni/bi directional – one time/repeat User Defined Profile up to 1000 Attenuation States		
Mechanical	Size (4RU)	17 x 13 x 7.0 inches 431.8 x 330.2 x 177.8 millimeters	
	Weight	22 lbs 10.0 kg	


¹ LDA-802-64 has all SMA connectors on the front panel. Model LDA-802-64A has input SMA connectors on the front panel and output SMA connectors on the rear panel.




LDA-802-64 Performance Plots













LDA-802-64 Mechanical Outline

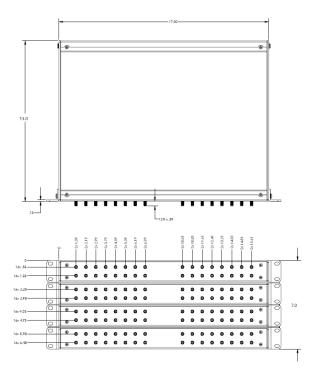

LDA-802-64 Software Interface

Windows GUI

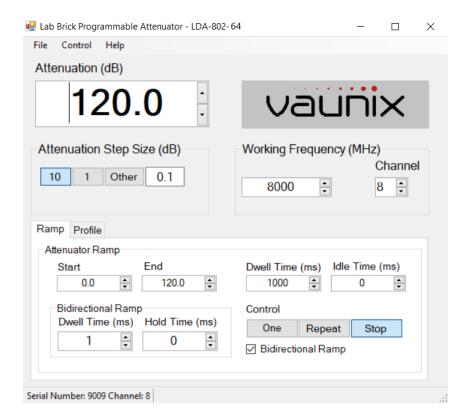



Ethernet GUI

